

076 APR 2005


PCT/IB.03-/04164
10.10.03



Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

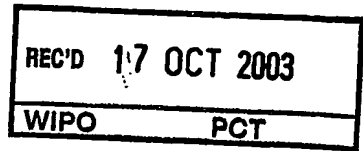

Bescheinigung

Certificate

Attestation


Die angehefteten Unterla-
gen stimmen mit der
ursprünglich eingereichten
Fassung der auf dem näch-
sten Blatt bezeichneten
europäischen Patentanmel-
dung überein.

The attached documents
are exact copies of the
European patent application
described on the following
page, as originally filed.

Les documents fixés à
cette attestation sont
conformes à la version
initialement déposée de
la demande de brevet
européen spécifiée à la
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

02079175.2

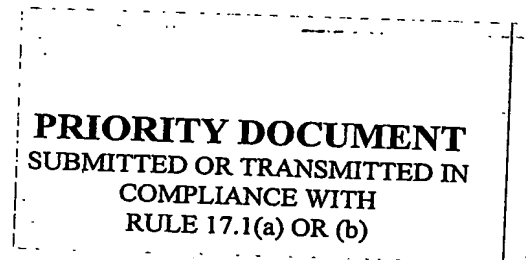

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk

Best Available Copy



Anmeldung Nr:
Application no.: 02079175.2
Demande no:

Anmeldetag:
Date of filing: 09.10.02
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Koninklijke Philips Electronics N.V.
Groenewoudseweg 1
5621 BA Eindhoven
PAYS-BAS

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.
If no title is shown please refer to the description.
Si aucun titre n'est indiqué se référer à la description.)

3 panel transmissive projection system

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s)
revendiquée(s)
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/
Classification internationale des brevets:

H04N9/31

Am Anmeldetag benannte Vertragstaaten/Contracting states designated at date of
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR IE IT LI LU MC NL PT SE SK TR

3 panel transmissive projection system

EP 1 102 002

01.10.2002

(94)

FIELD OF INVENTION

This invention relates to a 3 panel transmissive projection system. In particular, this invention relates to a 3 panel transmissive projection system applying reflective type polarizers for both polarizing and analyzing operations in the projection system.

BACKGROUND OF INVENTION

Projection systems, such as for example described in US patent application no. 2002/0015135, generally use a reflective LCD array with a single polarizing beam splitter. However, the by combining the light path from the light source and the display panels with the light path between the display panels and the projection lens the light paths cannot be optimized individually.

The high temperature (HT) poly film technology provides high brightness using small miniaturized LCD panels. However, the combination of miniaturisation and high light output causes extreme high light densities in the light path, thus limiting the lifetime expectancy of the LCD panels and polarizing films. The manufacturers of HT poly film projection system continuously improve the lifetime expectancy of the LCD panels, however, improvements in the lifetime expectancy of the polarizing films has almost come to a halt. Hence the lifetime expectancy of the HT poly film projection system is limited by the lifetime of the polarizing films.

SUMMARY OF THE INVENTION

An object of the present invention is to provide a projection system having high brightness capabilities in combination with having an improved lifetime expectancy.

It is a further object of the present invention to provide a transmissive type projection systems, such as transmissive HT Poly silicon LCDS's, so as to ensure that the light path between the light source and the display panel(s) and the light path between the display panel(s) and the projection lens are completely separated, and therefore may be optimized individually, leading to a higher system efficiency, and to a higher brightness.

A particular advantage of the present invention is provision of low cost projection system providing high brightness and having a long lifetime expectancy using miniaturized transmissive display panels.

5 A particular feature of the present invention relates to the provision polarizers for the analyzing operation and for the polarization operation of the projection system.

This object is achieved according to a first aspect of the present invention by a projection system for projecting an image on to a projection surface comprising:

- (a) a light source for supplying light;
 - (b) an optical element for gathering and focusing said light thereby providing a light beam;
 - 10 (c) a first reflective polarizer for polarizing said light beam thereby generating a polarized light beam;
- characterized in further comprising
- (d) a transmissive display panel for receiving said polarized light beam and for manipulating said polarized light beam thereby encoding image information on said polarized light
 - 15 beam and generating an encoded light beam;
 - (e) means for controlling each pixel of said transmissive display panel so as to control manipulation of said polarized light beam; and
 - (f) a second reflective polarizer for rejecting unwanted polarizations of said encoded light beam and for transmitting desired polarization of said encoded light beam to said
 - 20 projection surface.

The term image is in this context to be construed as a frame of a video sequence, a still photograph or still digital representation or any combination thereof.

25 The second reflective polarizer according to the first aspect of the present invention may be oriented with respect to the encoded light beam at incident angles in the range between approximately 30° to 60° , such incident angles as 35° , 45° or 55° . By orienting the second reflective polarizer acting as an analyzer in an angle of approximately 45° ghost images generated by light bounced back from the second reflective polarizer to the display panel are avoided.

30 The projection system according to the present invention may be realised by folding the light path from the light source to the projection surface in a two layer structure. By folding the light path the projection system advantageously enables to provide a very compact projection system.

The transmissive display panel may comprise an electro-optical medium such as liquid crystal or plasma, or electro-chrome or electro-phoretic elements, light emitting

elements, organic or inorganic light emitting elements, polymer light emitting elements, or any combination thereof. Any type of display elements may be used for the transmissive display panel as long as the display substrates are transparent or opaque. The flexibility of transmissive display panel type provides for a projection system, which may be designed in accordance with a wide variety of customer requirement or specifications.

The means for controlling each pixel of the transmissive display panel according to the first aspect of the present invention may be implemented using any processor techniques known to persons skilled in the art. The means for controlling each pixel may be incorporated on the transmissive display panel substrate thereby reducing the space required and optimizing the production costs.

The second reflective polarizer may comprise a Moxtek™ beam splitter. By utilising a Moxtek™ beam splitter for the analyzing operation of the projection system an excellent brightness, low cost, and long lifetime expectancy is obtained. The Moxtek™ beam splitter removes the disadvantages of the polarizer films.

BRIEF DESCRIPTION OF THE DRAWINGS

The above, as well as additional objects, features and advantages of the present invention, will be better understood through the following illustrative and non-limiting detailed description of preferred embodiments of the present invention, with reference to the appended drawings, wherein:

Figure 1, shows a schematic diagram of the elements and light path for one colour in the preferred embodiment of the present invention; and

Figure 2, shows a detailed diagram of the elements and light paths for red, green and blue colours, for simplicity shown unfolded, for the preferred embodiment of the present invention.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

In the following description of the various embodiments, reference is made to the accompanying figures which form a part hereof, and in which is shown by way of illustration various embodiments in which the invention may be practiced. It is to be understood that other embodiments may be utilized and structural and functional modifications may be made without departing from the scope of the present invention.

Figure 1, shows a projection system designated in its entirety by reference numeral 10 and projecting images on to a projection surface 12. The projection system 10

comprises a light source 14 supplying the light to be transmitted through the projection system 10. The projection surface 12 may be established on any type of surface such as a white wall or a projector screen.

5 The light source 14 supplies light to an optical element 16 for gathering and focusing the light thereby providing a light beam. The optical element 16 may be implemented by a rod integrator. The optical element 16 comprises a first end 18 for receiving the light and a second end for providing the gathered and focused light 20. A small colour separation prism 22 is placed adjacent to the second end 20. An entrance surface 24 of the colour separation prism 22 is substantially equal to the surface of the second end 20. The
10 colour separation prism 22 separates the light into respectively red, blue and green coloured light, which is subsequently reflected onto separate exit planes of the colour separation prism 22. Figure 1 shows only one light path for one colour for simplicity reason entirely.

The coloured light 26 exiting the colour separation prism 22 is directed through a first lens 28 focusing the coloured light 26 onto a first polarizer 30 being
15 transmissive to unwanted polarizations of coloured light and reflective to desired polarizations, i.e. reflecting a polarized light beam 32. In an alternative embodiment of the present invention, the first polarizer 30 may be reflective to unwanted polarizations of coloured light and transmissive to desired polarizations. This however, obviously, requires a change in the design and in the light path from the light source to the projection surface.

20 In addition, the first polarizer 30 may be reflective to both desired and undesired polarizations of the coloured light. The desired polarizations of the coloured light being directed in one direction and the un-desired polarizations in another direction.

The polarized light beam 32 is focussed through a second and third lens 34 communicating the polarized light beam to a transmissive display panel 36 modulating the
25 polarized light beam so as to encode image information thereon. The transmissive display 36 panel is controlled by a processor controlling each pixel of the transmissive display panel 36.

The transmissive display 36 panel may be implemented in a number of ways. By way of example a transmissive display panel having an opaque substrate may utilise an electro-optical medium such as liquid crystal or plasma, or electro-chrome or electro-phoretic
30 elements, light emitting elements, organic or inorganic light emitting elements, polymer light emitting elements, or any combination thereof.

In the preferred embodiment of the present invention the transmissive display panel 36 utilises a liquid crystal display array.

The colour separation prism 22 is, as described above, placed adjacent to the optical element 16, so as to form an extension on the optical element 16. Hence the colour separation prism may be made very small. This however, necessitates that the coloured light is expanded in cross sectional area so as to match the transmissive display panel 36. The expansion of the coloured light is performed by the second lens 34.

Figure 1 shows a single transmissive display panel 36 for simplicity only. It is to be understood that each of the coloured lights separated by the colour separating prism 22 are communicated to a specific transmissive display panel.

The transmissive display panel generates an encoded light beam 38, which is communicated to a second polarizer 40 operating as an analyzer rejecting unwanted polarizations of the encoded light beam from the light path.

The second polarizer 40 is transmissive to unwanted polarizations of the encoded light beam and reflective to desired polarizations of the encoded light beam. In an alternative embodiment of the present invention, the second polarizer may be reflective to unwanted polarizations of coloured light and transmissive to desired polarizations. This however, obviously, requires a change in the design and in the light path from the light source to the projection surface.

In addition as described with reference to the first polarizer 30, the second polarizer 40 may be reflective to both desired and un-desired polarizations of the encoded light beam. The desired polarizations of the encoded light beam being directed in one direction and the un-desired polarizations in another direction.

The first and second polarizers 30, 40 may in the preferred embodiment of the present invention be implemented by a MoxtekTM beam splitter. However, the first and second reflective polarizers 30, 40 may be implemented by a wide variety of polarizers such as wire grid polarizers, cholesteric polarizers, interference films, holographic structures, stacks of thin birefringent films, beam splitters, mirrors or any combination thereof.

The polarized and encoded light 42 is received in a recombination prism 44 gathering each of the polarized and encoded light beams from each of the coloured light paths, i.e. the red, green and blue light paths. The recombined light forms a complete image to be projected through a projection lens 46 onto to the projection surface 12.

The two prisms 22 and 44 may be implemented in a wide variety of ways, however in the presently preferred embodiment of the present invention the prisms 22 and 44 are implemented by a first and second dichroic cube.

Figure 2 shows a projection system designated in its entirety by reference numeral 50. Figure 2 contrary to figure 1 shows three light paths: a red light path 51a, a green light path 51b, and a blue light path 51c.

For elements of the projection system 10 described with reference to figure 1, which are identical to elements of figure 2, the same reference numeral has been applied.

The light source 14 supplies the light of the projection system 50 and the optical element 16 focuses and gathers the light from the light source 14 prior to directing the light to a colour separation prism 22. The colour separation prism is shown in figure 2 as prisms having reference numeral 22a, 22b and 22c. The prism 22a provides the red light through the red light path 51a to a first transmissive display panel 36a. The prism 22b provides the green light through the green light path 51b to a second transmissive display panel 36b. The prism 22c provides the blue light through the blue light path 51a to a third transmissive display panel 36c.

Each of the transmissive display panels 36a, 36b and 36c modulate the light in accordance with the generation of particular images. The transmissive display panels 36a, 36b and 36c are controlled by one or more processors controlling each pixel of the transmissive display panels 36a, 36b and 36c.

The encoded lights: encoded red, encoded green, and encoded blue are enhanced through sets of lenses 52a, 52b, 52c and 54a, 54b and 54c. The sets of lenses enables the use of very small dichoric cube for the colour recombination prism 44.

As described with reference to figure 1, the light now recombined is projected on the projection surface through a projection lens 46.

The projection system 50 may be folded into a two layer configuration using polarizers for the polarizing and analyzing operation, similarly as described with reference to figure 1.

CLAIMS:

J. A. 100

(94)

1. A projection system for projecting an image on to a projection surface comprising:

(a) a light source for supplying light;

(b) an optical element for gathering and focussing said light thereby providing a light beam;

5 (c) a first reflective polarizer for polarizing said light beam thereby generating a polarized light beam;

characterized in further comprising

(d) a transmissive display panel for receiving said polarized light beam and for manipulating said polarized light beam thereby encoding image information on said polarized light

10 beam and generating an encoded light beam;

(e) means for controlling each pixel of said transmissive display panel so as to control manipulation of said polarized light beam; and

(f) a second reflective polarizer for rejecting unwanted polarizations of said encoded light beam and for transmitting desired polarization of said encoded light beam to said

15 projection surface.

2. A projection system according to claim 1, wherein said first and second reflective polarizers comprises wire grid polarizers, cholesteric polarizers, interference films, holographic structures, stacks of thin birefringent films, beam splitters, mirrors or any

20 combination thereof.

3. A projection system according to claim 1 or 2, wherein said second reflective polarizer is oriented with respect to said encoded light beam at incident angles in the range between approximately 30° to 60° , such incident angles as 35° , 45° or 55° .

25

4. A projection system according to any of claims 1 to 3, wherein said projection system is realised by folding the light path from said light source to the projection surface in a two layer structure.

5. A projection system according to any of claims 1 to 4, wherein said transmissive display panel comprises an electro-optical medium such as liquid crystal or plasma, or electro-chrome or electro-phoretic elements, light emitting elements, organic or inorganic light emitting elements, polymer light emitting elements, or any combination thereof.

6. A projection system according to any of claims 1 to 5, wherein said means for controlling each pixel of said transmissive display panel is implemented using a processor.

7. A projection system according to any of claims 1 to 6, wherein said means for controlling each pixel may be incorporated on said transmissive display panel substrate.

8. A projection system according to any of claims 1 to 7 further comprising an optical element for gathering said light from said light source and having an exit surface adjacent to a colour separation prism having an entrance surface substantially equal to said exit surface.

9. A projection system according to claim 8, wherein said colour separation prism is adapted to separate said light supplied by said light source into red, green and blue coloured lights.

10. A projection system according to any of claims 1 to 9, wherein said transmissive display panel comprises a first, second and third transmissive display panel unit respectively.

11. A projection system according to any of claims 8 to 10, wherein said colour separation prism is adapted to communicate red, green and blue coloured lights to said first, second and third transmissive display panel units.

12. A projection system according to any of claims 1 to 11 further comprising a recombination prism for recombining encoded light beams into a single encoded light beam.

13. A projection system according to claim 12, wherein said recombination prism is adapted to receive encoded red, green and blue light from said first, second and third

transmissive display panel units and said recombination prism recombining said encoded red, green and blue light into a single encoded light beam to be projected through a projection lens onto to said projection surface.

- 5 14. A projection system according to any of claims 11 to 13 further comprising focussing lenses for focussing said encoded light before said colour recombination prism.

15. A projection system according to any of claims 1 to 14 further comprising enlarging lenses for providing a polarized light beam covering the full surface of said
10 transmissive display panel.

ABSTRACT:

This invention relates to a 3 panel transmissive projection system. In particular, this invention relates to a 3 panel transmissive projection system applying reflective type polarizers for both polarizing and analyzing operation in the projection system.

5

Figure 1

EPC 0000000000

00 00 0000

(94)

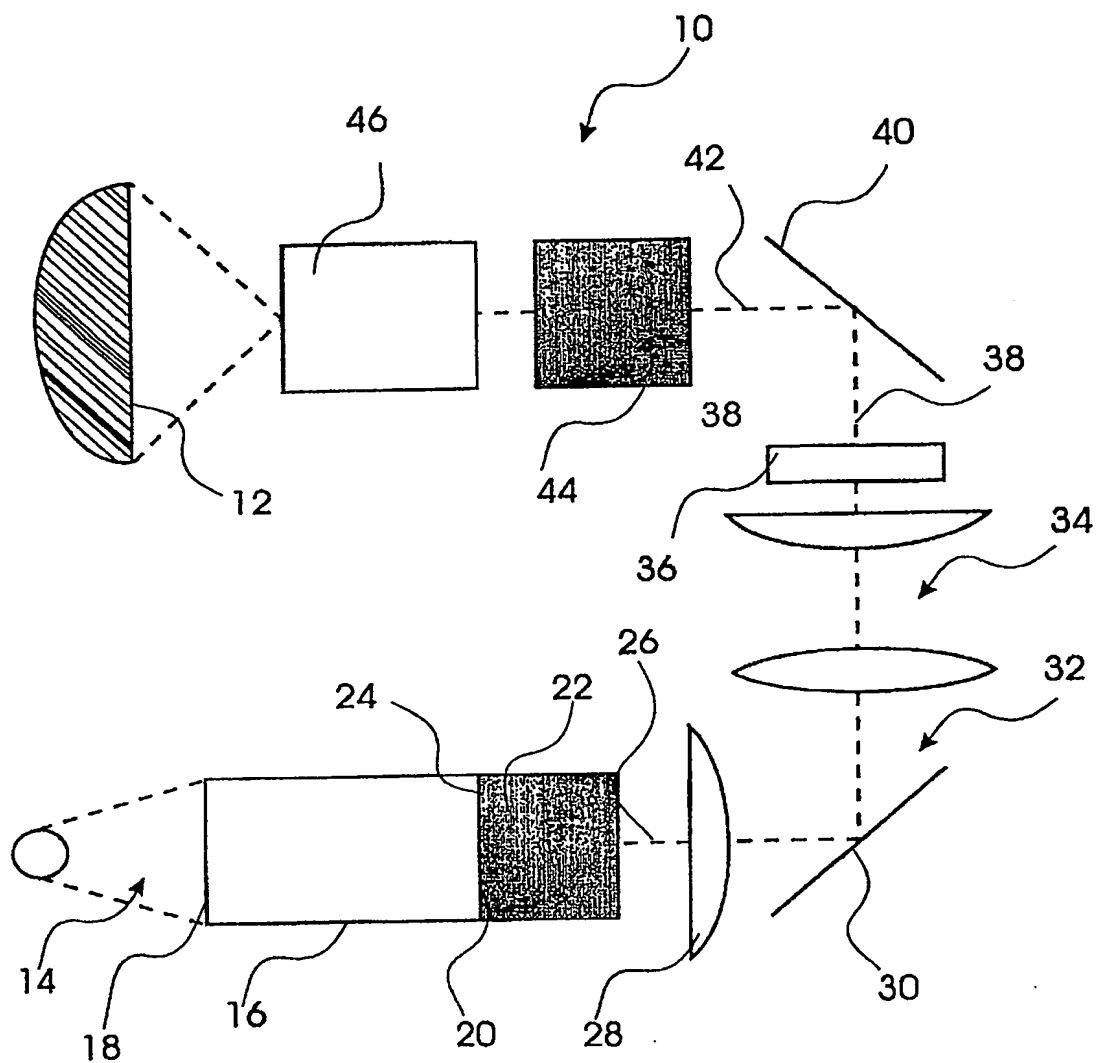


FIG. 1

2/2

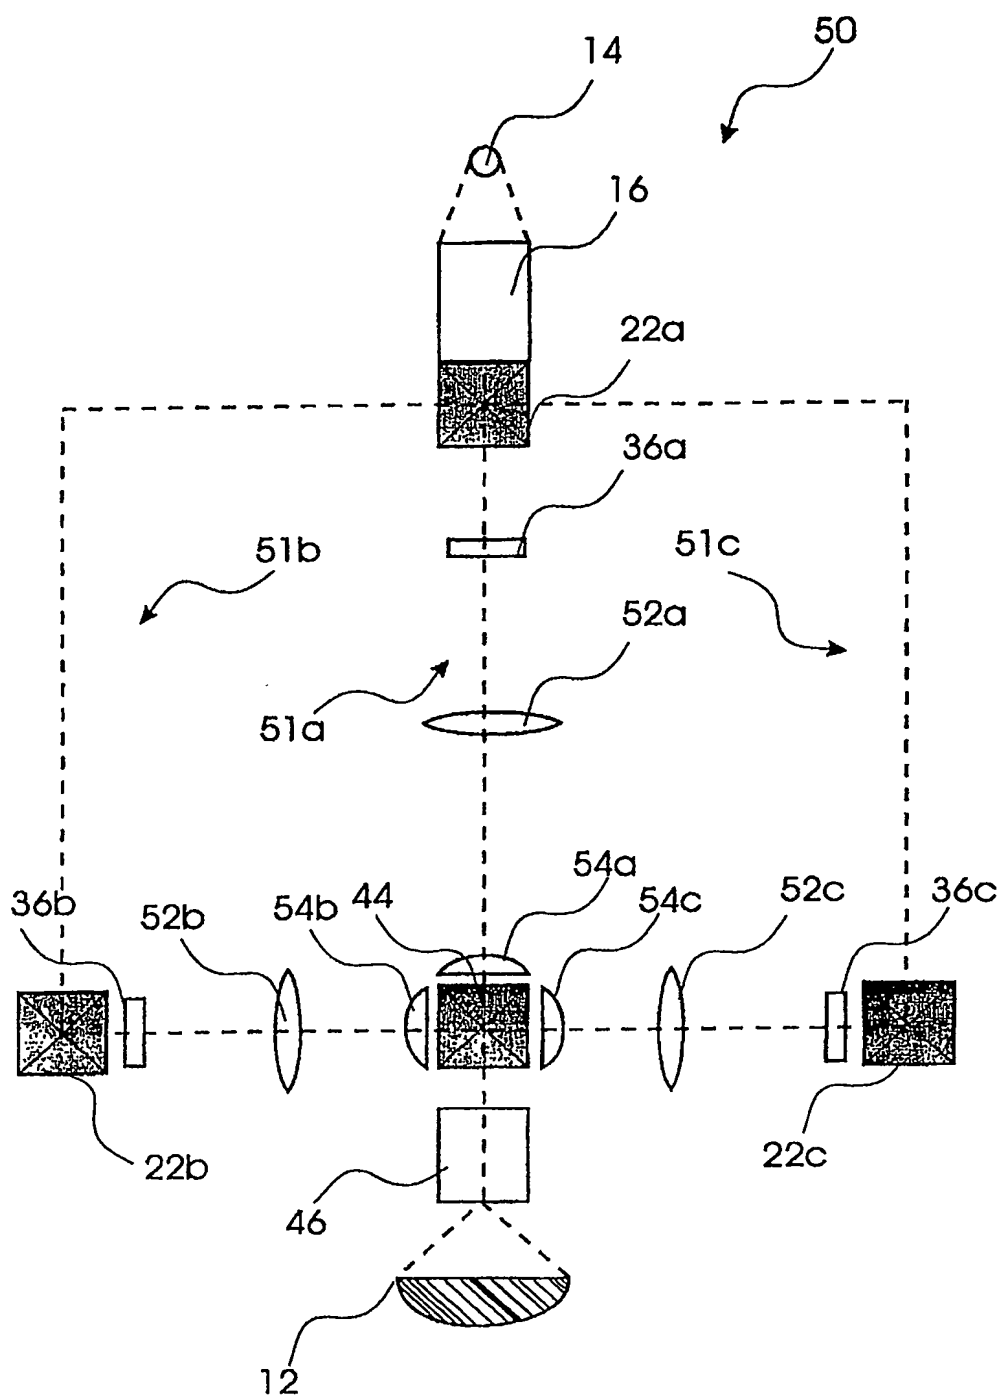


FIG. 2

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.